DRAFT FOR CONSULTATION

APPENDIX 2

SITE QUALITY CHECKLIST FOR AN INDIVIDUAL SANG-For the creation of suitable SANG, produced by SEERA June 2008

The wording in the list below is precise and has the following meaning:


- · Requirements referred to as "must" or "should haves" are essential
- The SANGS should have at least one of the "desirable" features.

Must/ Should haves

- For all sites larger than 4ha there must be adequate parking for visitors, unless the site is intended for local use, i.e. within easy walking distance (400m) of the developments linked to it. The amount of car parking space should be determined by the anticipated use of the site and reflect the visitor catchment of both the SANGS and the SPA.
- It should be possible to complete a circular walk of 2.3-2.5km around the SANGS.
- Car parks must be easily and safely accessible by car and should be clearly sign posted.
- The accessibility of the site must include access points appropriate for the particular visitor use the SANGS is intended to cater for.
- The SANGS must have a safe route of access on foot from the nearest car park and/or footpath/s.
- All SANGS with car parks must have a circular walk which starts and finishes at the car park.
- SANGS must be designed so that they are perceived to be safe by users; they must not have tree and scrub covering parts of the walking routes.
- Paths must be easily used and well maintained but most should remain unsurfaced to avoid the site becoming to urban in feel.
- SANGS must be perceived as semi-natural spaces with little intrusion of artificial structures, except in the immediate vicinity of car parks. Visually-sensitive way-markers and some benches are acceptable.
- All SANGS larger than 12 ha must aim to provide a variety of habitats for users to experience.
- Access within the SANGS must be largely unrestricted with plenty of space provided where it is possible for dogs to exercise freely and safely off lead.
- SANGS must be free from unpleasant intrusions (e.g. sewage treatment works smells etc).
- SANGS should be clearly sign-posted or advertised in some way.
- SANGS should have leaflets and/or websites advertising their location to potential users. It would be desirable for leaflets to be distributed to new homes in the area and be made available at entrance points and car parks.

Desirable

- It would be desirable for an owner to be able to take dogs from the car park to the SANGS safely off the lead.
- Where possible it is desirable to choose sites with a gently undulating topography for SANGS
- It is desirable for access points to have signage outlining the layout of the SANGS and the routes available to visitors.
- It is desirable that SANGS provide a naturalistic space with areas of open (non-wooded) countryside and areas of dense and scattered trees and shrubs. The provision of open water on part, but not the majority of sites is desirable.
- Where possible it is desirable to have a focal point such as a view point, monument etc within the SANGS.

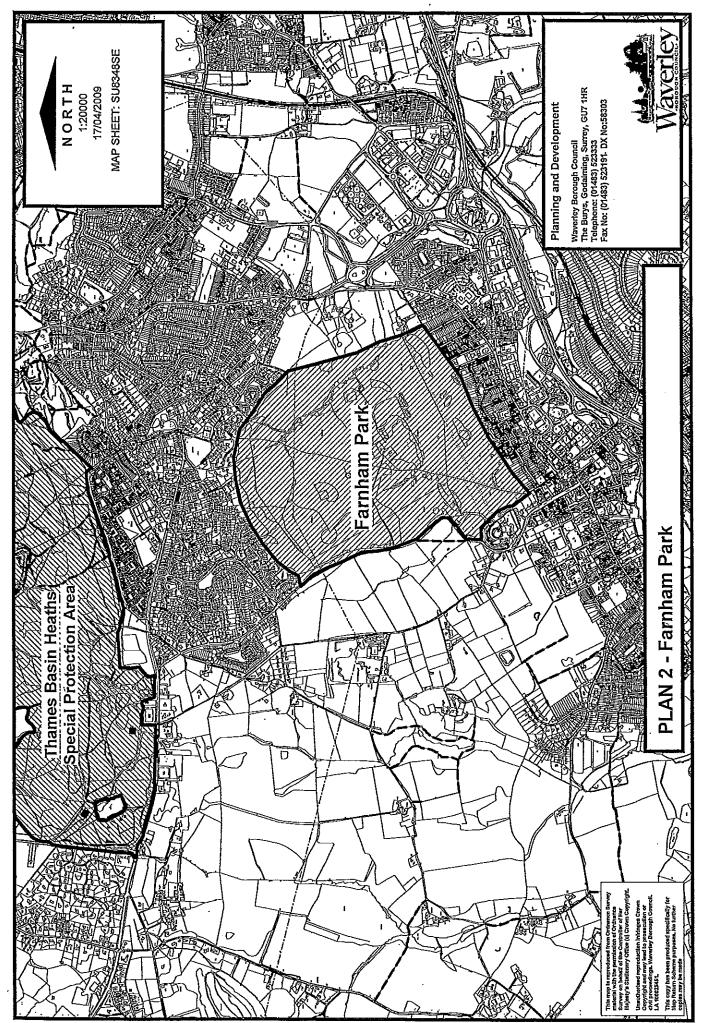

DRAFT FOR CONSULTATION

APPENDIX 3 IMPLEMENTATION OF SANG ENHANCEMENTS IN FARNHAM PARK

Item	Date
Completed	
Visitor Survey & analysis	May Aug 2007
Full time ranger	From Oct 2007 (vacancy Aug 08 – Jan 09)
Car park improvements at Ranger's & Upper Hale Recreation Ground car parks & signing	Aug – Nov 2007
Watch out for Wildlife leaflet	April 2008
Conversion of Park Lodge to ranger office & interpretation centre	Oct 2008 – Jan 2009
Currently Underway	
Interpretation centre panels	To be installed May 2009
Main access points information panels	To be installed July 2009
Outstanding	
Revised park leaflets	Sept 2009
Main car park enhancements	2009/2010
Entrance improvements & signage	2009/2010

()